

Model: C1250 D5A
Frequency: 50
FuelType: Diesel

»Generator set data sheet

1250kVA Standby



Our energy working for you.™

| Fuel consumption | Standby | | | | Prime | | | |
|-------------------------|-----------------|------------|------------|-------------|-----------------|------------|------------|-------------|
| | kW (kVA) | | | | kW (kVA) | | | |
| Ratings | 1000(1250) | | | | 900(1125) | | | |
| Load | 1/4 | 1/2 | 3/4 | Full | 1/4 | 1/2 | 3/4 | Full |
| USgph | 20.9 | 36.2 | 51.8 | 67.6 | N.A. | N.A. | N.A. | N.A. |
| L/hr | 79 | 137 | 196 | 256 | N.A. | N.A. | N.A. | N.A. |

| Engine | Standby rating | Prime rating |
|--------------------------------|--------------------------------------|---------------------|
| Engine manufacturer | Cummins | |
| Engine model | KTA38G9 | |
| Configuration | 4-Cycle; 60° Vee; 12-Cylinder Diesel | |
| Aspiration | Turbocharged and Aftercooled | |
| Gross engine power output, kWm | 1089 | N.A. |
| BMEP at set rated load, kPa | 2296 | N.A. |
| Bore, mm | 159 | |
| Stroke, mm | 159 | |
| Rated speed, rpm | 1500 | |
| Piston speed, m/s | 7.9 | |
| Compression ratio | 13.9:1 | |
| Lube oil capacity, L | 114 | |
| Over speed limit, rpm | 1800±50 | |
| Regenerative power, kWm | 86 | |
| Governor type | Electronic | |
| Starting voltage | 24VoltsDC | |

| Fuel flow | |
|---------------------------------------|-----|
| Maximum fuel flow, L/hr | 428 |
| Maximum fuel inlet restriction, mm Hg | 203 |
| Maximum fuel inlet temperature(°C) | 60 |

| Air | |
|--|------|
| Combustion air, m ³ /min | 78.5 |
| Maximum air cleaner restriction, mm H ₂ O | 635 |

| Exhaust | Standby rating | Prime rating |
|---|-----------------------|---------------------|
| Exhaust gas flow at set rated load, m ³ /min | 212.4 | N.A. |
| Exhaust gas temperature, °C | 529 | N.A. |
| Maximum exhaust back pressure, mm Hg | 76 | |

| Standard set-mounted radiator cooling | | |
|--|-------|------|
| Ambient design, °C | 40 | |
| Fan load, KW _m | 24 | |
| Coolant capacity (with radiator), L | 336 | |
| Cooling system air flow, m ³ /min@12.7 mmH ₂ O | 1128 | |
| Total heat rejection, BTU/min | 37960 | N.A. |
| Maximum cooling air flow static restriction mmH ₂ O | 12.7 | |


| Weights* | Open | Enclosed |
|---------------------|-------------|-----------------|
| Unit dry weight kgs | 8179 | N.A. |
| Unit wet weight kgs | 8569 | N.A. |

* Weights represent a set with standard features. See outline drawing for weights of other configurations


| Dimensions | Length "A" | Width "B" | Height "C" |
|--------------------------------------|-------------------|------------------|-------------------|
| Standard open set dimensions, mm | 4722 | 1785 | 2241 |
| Enclosed set standard dimensions, mm | 20'container | - | - |

Genset outline

Open set

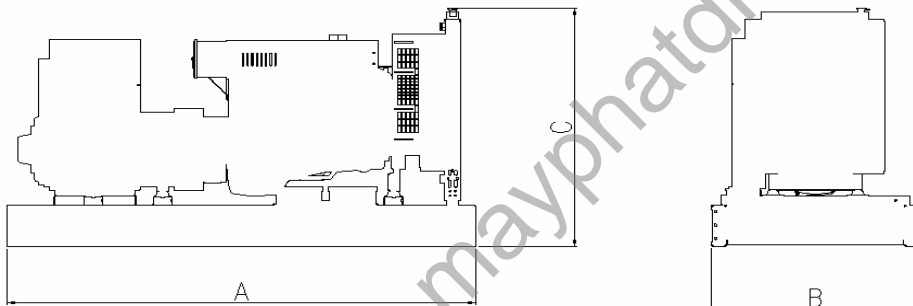

Enclosed set

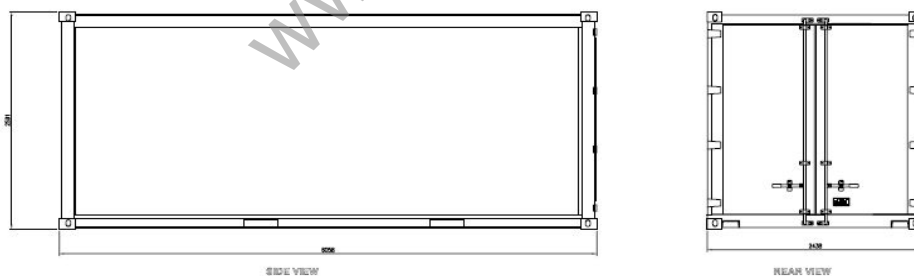

Outlines are for illustrative purposes only. Please refer to the genset outline drawing for an exact representation of this model.

Our energy working for you.™

Alternator data

| Feature code | Connection ¹ | Temp rise | Duty ² | Alternator | Voltage |
|--------------|-------------------------|-----------|-------------------|------------|----------|
| - | Wye, 3 Phase | 125/105 | S/P | P7A | 380-415V |

Ratings definitions

| Standby: | Limited Time Running: | Prime (unlimited running time): | Base Load (Continuous): |
|--|--|---|---|
| Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514. | Applicable for supplying power to a constant electrical load for limited hours. Limited Time Running Power is in accordance with ISO 8528. | Applicable for supplying power to varying electrical load for unlimited hours. Prime Power is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514. | Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous power in accordance with ISO 8528, ISO 3046, AS 2789, DIN 6271 and BS 5514. |

Notes:

- Limited single phase capability is available from some three phases rated configurations. To obtain single phase rating, multiply the three phase kW rating by the single phase factor. All single phase ratings are at unity power factor.
- Standby (S) and Prime (P) ratings.

Formulas for calculating full load currents:

Three phase output

$$\frac{\text{kW} \times 1000}{\text{Voltage} \times 1.732 \times 0.8}$$

Single phase output

$$\frac{\text{kW} \times 1000}{\text{Voltage}}$$

See your distributor for more information.

Nguyen Gia Equipment & Technology Co., Ltd
 No 2 Nguyen Van Huyen,
 Cau Giay District,
 Hanoi City, Vietnam
 Telephone: +84 (0) 24 6682 7066
 Fax +84 (0) 24 3212 3880
 E-mail: sales.vinpower@gmail.com
 Web: <http://mayphatdiendiesel.vn>

Our energy working for you.™